

PARKKY[®]



ENG | 2023

It's good to live on wood



Contents

4	It's good to live on wood
8	Why Parky
14	Collection
24	Inspiration
44	Installation and maintenance
48	Overview

It's good to live on wood



Wood is something to love. It brings nature into your home. Due to the uniqueness and characteristics of the trees, not one board is the same. The beauty of imperfections caused by the veins and structure brings life-hood to your floor. Easy to install like a laminate floor, care and maintenance free as vinyl but with the warmth and cosiness of real hard wood.



As sustainable grown wood is getting scarce, we are extremely mindful using it. By using veneers, thinly sliced layers of real wood, we maximize the use of the harvested wood species grown over decades. Reinforcing the thin layers of wood with an HDF carrier, a high-density fibre board made of 100% recovered wood, we create all natural floors which are stronger and way more durable than solid parquet.

Our goal is to make wood floors that inspire. For over 40 years we have innovated our production processes to achieve a rock solid finish, suitable for intensive and even commercial use. Everything is made in Belgium, at the heart of Europe, with the help and knowledge of an amazing team. 900 employees around the globe are fully committed to create the floor for your home or project. We are going the extra mile to create fabulous looks, next-level durability and sharp prices with woods full of character. This in order for you to achieve the interior look and feel of your dreams.



Our Titanium finish has eight robust layers of lacquer, making the natural floor 2x more scratch-resistant and ready for intensive use.



Why Parky



02

A sustainable choice

Wood is precious. Therefore we use it sparingly: we only use a thin layer of wood for the top layer. This way we use 25 times less wood than required for the production of solid parquet. Every tree we use comes from well-managed forests. We also get 100% of our energy from renewable sources such as solar and wind power. Finally, the sawdust and wood waste from our production facility is used to heat the floor space during winter. For us, the future is a CO₂ neutral world.

Real wood

Feel real wood. Each Parky floor is finished with a **top layer of authentic wood species**, in oak or walnut. Just like a solid wood floor, no two boards are the same. A beautiful natural look, combined with the warmth of wood.



01

03

Waterproof surface

The Parky board has a **waterproof surface** that holds back water for at least 12 hours. Both the planks and the grooves are protected, thanks to Aqua Sealing Complete technology. This makes your floor bulletproof for daily spills and drops.



04

High-strength and scratch resistant

Parky floors are ultra strong. On one hand, the wooden top layer is pressed onto a **high density fibre board (HDF)**, that makes your floor stronger and more dimensionally stable than any traditional solid or engineered wooden floor.

On the other hand, the wooden top layer is finished with our **Titanium finish**, that consists of eight robust layers of lacquer. This makes your floor 2x more scratch-resistant than a traditional lacquer finish and ready for intensive and even commercial use. Use Parky with peace of mind in your kitchen or in larger projects with high traffic areas, such as hotel lobbies, offices, retail stores...



The secret lies in the well-thought-out structure



Titanium: the ultra-strong, invisible, 8-layer varnish

There is a reason why we call it **Titanium**. Due to the eight layers of bulletproof lacquer, your floor is **2x more resistant to daily wear and tear and scratches**. Also, the wood pores are **protected from moisture and dirt**. And yet, thanks to the **super matt and brushed finish**, the natural feel and timeless elegance of wood are preserved. Not to mention, the Titanium finish requires no post-treatment and makes re-sanding completely unnecessary!



Wood backing for dimensional **stability**.

With Deluxe+ a 2 mm layer of cork provides a **comfortable sound absorption**.

Real Wood

On the HDF board we press a **wood wear layer** according to the DSI technology (Double Sided Impregnation). During this process the adhesive gets pressed into the wood. While lacquering the top layer, the wood absorbs the varnish and makes a fusion with the adhesive. This makes the top layer of wood ironclad.



Sturdy HDF board

The thinner the wooden top layer, the more resistant the floor is to impacts. This is because the HDF, a high-density fibre board made of 100% recovered wood, is even **stronger than natural wood**. Thus, we ensure that the floor is 3x more resistant to heavy objects or stiletto heels than solid parquet.



Wear layer 0,6 mm oak Wear layer 2 mm oak Solid oak



Completely hygienic

The V grooves are not a hotbed for dust and dirt. Each groove is coloured and sealed with the **Aqua Sealing Complete system**. This **protects your wood against moisture for 12 hours** and makes maintenance a piece of cake. A hygienic floor is guaranteed.



Easy to install


Parky, it's as **easy to install as laminate and LVT**. Count on the handy **Uniclic®** and **Unifit X®** fold-down system for a problem free result. The warmth and feel good of wood is just a click away.



Discover even more advantages

Perfect match with your radiant heating

Different kinds of radiant heating systems can be used with Parky. All technical details can be found in the technical table at the back and on our website.



Floor for healthier indoor air quality.

The Parky floor is only finished with water based stains, adhesives with a minimum of volatile organic compounds and stains with a minimum of solvents. It is scientifically proven: indoor **air quality improves** with a Parky floor. All floors have a **A+ quality label**.





Experience your best moments on a real wooden floor. Imitations such as vinyl or laminate can never match the warmth and uniqueness of real wood. You don't just see it, you feel it...

Endless variations with pure nature



- **Your species**
Wide range of wood species and colours.
- **Your patterns**
From straight boards to a herringbone pattern.
- **Your sizes**
Boards in different lengths, widths and thicknesses, with or without a 2 mm cork underlayer.

Pick your colour

Oaks



European Oak



Essence Oak



Ivory Oak



Milk Oak



Silk Oak



Desert Oak



Umber Oak



Valley Oak



Antique Oak



Mountain Oak

Walnuts



Frozen Walnut



Smoked Walnut

Do you prefer authentic oak planks, or would you prefer a walnut parquet with a pronounced structure? From milky white to rich chocolate brown, we are happy to help you choose the right colour.



More information regarding the possible combinations of colour, style or size can be found on page 48

The uniqueness of oak

If you choose oak, you have two options. The Premium grading gives you the emphasis of a pure and clean look; the Rustic Light variant has a more pronounced character thanks to the knots. It's up to you to choose the look and feel you want.

PREMIUM

We only use the purest veneer wood for our Premium boards. Exceptionally pure quality from the very best of nature.

RUSTIC LIGHT

This rustic wooden floor seeks the balance between smaller and larger knots for a more pronounced style.



More information regarding the possible combinations of colour, style or size can be found on page 48



The pattern that suits you


Parky offers you endless combinations. Whatever pattern you choose, it remains timeless, from ultra-sleek villas to stately mansions and everything in between. Different lengths and widths offer a wide range of choices: from a classically laid board floor to a herringbone pattern. Even a double herringbone pattern is possible.

Swing Ivory Oak Premium




Deluxe+ Ivory Oak Premium


Herringbone




Double herringbone




Available as pattern floor



European Oak Premium



Ivory Oak Premium or Rustic Light



Smoked Walnut



Calculate how many boards you need with our handy Pattern Calculator at patterns.par-ky.com



The **size of the room** determines the size of your boards. For smaller rooms, opt for narrow, short boards. For larger spaces, wider and longer boards are the way to go. The direction also affects the end result. If you lay out your boards lengthwise, your room looks bigger.

We'll give you **five possible sizes** to work with. Don't worry if you find it difficult to choose, feel free to ask your distributor for advice.

Two click systems
 All our floors are equipped with the handy **Uniclic®** or **Unifit X®** fold-down system, which makes installation as easy as it can be. With the Unifit X® fold-down option, you can even save 30% on installation time. All the advantages of a click laminate, but with the difference that you feel the warmth of real wood under your feet.

Board floors

Pro



1203 x 190 x 7,2 mm



Master



1506 x 166 x 10 mm

Deluxe+



1810 x 166 x 12 mm

incl. 2 mm cork



Summit




2050 x 233 x 10 mm

Pattern floor


Swing



593 x 121 x 10 mm



Herringbone



Double herringbone



Which colour and style can be combined can be found in the overview on page 48



Calculate how many boards you need with our handy Pattern Calculator at patterns.par-ky.com



Silk Oak Premium

Floors made to live on

Each wood specie has its own character that can match your personality or taste. You choose from a wide range of colours, patterns and sizes until you find the wooden floor that fits perfectly into your interior. Sleek and subtle, rustic for a pronounced touch or the warm character of our Walnut collection – you decide.



Smoked Walnut



Ivory Oak Rustic Light

Wood is a natural product.

The differences in colour and structure are part of it. This makes it **beautiful and unique**. There are different grading options, each of which gives the floor a certain appearance. Are you looking for a **sleek, modern interior**? Then choose a **Premium** quality. Do you prefer a **country style**? Then go for **Rustic Light**.



Ivory Oak Premium



Frozen Walnut



Milk Oak Premium



Valley Oak Premium

Commercially rated floors

Parquet floors are made to live up to their full potential. This also makes them suitable for places where there is a lot of traffic, such as an office or retail. Lots of traffic isn't a problem: thanks to a high-quality finish in class 33, our floors are made for intensive use.



Mountain Oak Rustic Light



You can combine certain colours
with SHINNOKI® panels and
ASTRATA® slats and coustics,
providing a consistent wood
solution for your project.
Learn more at [decospan.com](https://www.decospan.com)

Ivory Oak Premium



Smoked Walnut

Live life to the fullest
and enjoy every piece
of floor. The colour,
the structure, the
warmth of real wood.



Essence Oak Rustic Light

Long, wide boards are ideal for larger spaces

The size of the space determines the size of the boards. For smaller spaces, it is best to choose narrow, short boards. In large spaces, broad, long boards come more into their own.

The orientation of the boards also has an effect. Long boards installed along the length of a room make the room look even longer.



European Oak Rustic Light



The finish that gives your wooden floor a touch of perfection


We finish each board with a **Titanium finish**: eight layers of high-strength lacquer that makes your floor rock-solid. On top, the Aqua Sealing Complete technology makes the surface **waterproof, protects the pores from dust and moisture** and makes **maintenance a piece of cake**.

Our **brushed** finish accentuates the natural structure of the wood and gives the grain a beautiful appearance. And finally, these brushed floors have a matt finish, giving them a very natural look.





Umber Oak Premium

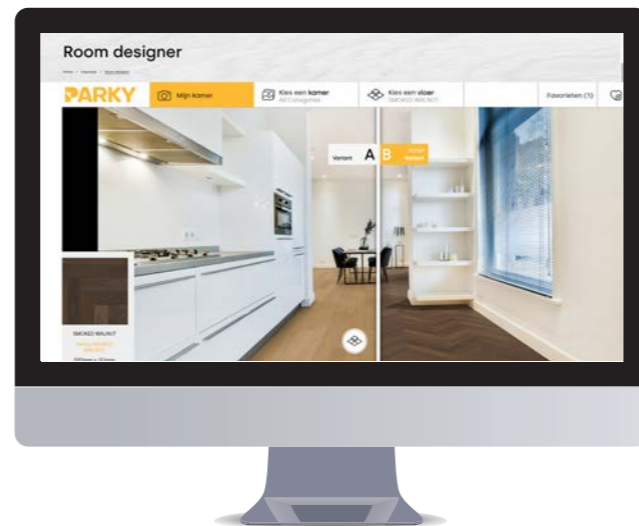

**View and compare all Parky floors
in your own room.
Discover our brand new "Room Designer"
on the site and via this QR code.**





Desert Oak Premium



Antique Oak Premium

These handy tools make it as easy as it can be to install



You will find the installation instructions on each package, on the site and via this QR code.

Installation kit

Installing Parky is easy. With our installation kit you have all the necessary tools to install your floor quickly and without damage: spacers to respect the expansion joint, a pull bar and a tapping block.



Choose the right underlay

Damp foil (150 micron, 25m²/pack)

- This damp foil serves as a vapour barrier and can only be used on Parky floors with an integrated cork layer (Deluxe+ 06). Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.



Basic underlay (2 mm thick, 20m²/roll)

- This affordable and high-quality underlay guarantees a comfortable sound absorption.
- Smooths out slight irregularities in the subfloor.
- Has an integrated moisture barrier. Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.



Silent underlay (2 mm thick, 20m²/roll)

- This premium underlay guarantees a maximum sound absorption and offers a contact sound insulation improvement of at least 20 dB.
- Smooths out slight irregularities in the subfloor.
- Has an integrated moisture barrier. Use our waterproof tape for perfect moisture protection.
- Suitable for radiant heating.



Waterproof tape



Protecting your floor against rising moisture is a must. We recommend you use Parky's tested waterproof tape to glue your underlay together. It's the only way to protect the backside of the floor.



This is how you finish your floor to the last detail

Skirtings

Wooden skirtings

The crowning glory: a matching wooden moulding.


Dimensions:
2150 x 80 x 12 mm
84.6 x 3.2 x 15/32 inch



Paintable skirtings

Choose white paint baseboards if you want a clean, modern look. You can easily paint the baseboards in the same colour as the wall.

Dimensions:
2150 x 69 x 12 mm
84.6 x 2.7 x 1/2 inch



Profiles


Wooden profile (residential applications)

This handy 3-in-1 profile is available in all Parky colours.

Particularly useful as

- End profile (jointless horizontal finish)
- Reducer profile (to bridge the gap with a lower floor)
- T-profile (expansion profile)

Dimensions:
2150 x 48 x 13 mm
84-5/8 x 1 7/8 x 33/64 inch

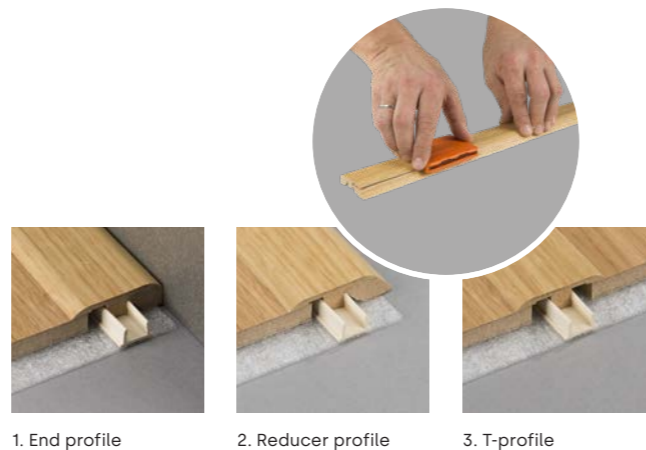

1. End profile 2. Reducer profile 3. T-profile

Aluminium profiles (commercial applications)

We developed aluminium profiles that are stronger than the wooden variant. Ideal for intensive use.

Dimensions:
■ Connecting profile 900 x 38 mm - 35.4 x 1.5 inch
■ End profile 2700 x 30 mm - 106.3 x 1.9 inch



Connecting profile End profile

How to keep your floor in a fabulous shape

You can count on the Parky cleaner to clean your floor without damaging the varnish. It was specially developed to remove dirt and protect your wood.



Wood Floor Cleaner

1000 ml
Dilute the cleaner with water.
Clean your floor with a slightly damp cloth.



Repair Pens

Repair small scratches in a jiffy. The box contains 1 colour pen and 1 lacquer pen. This way you can make the scratch invisible and give it again the necessary protection.



Repair Wax

Using the Repair Wax you can repair dents that come through the paint. The wax repairs the damage and protects your floor against penetrating moisture. The Repair Wax kit contains seven wax blocks, a melting knife and a spatula.


Severe damage? Not a disaster






Thanks to the clic system, you can easily replace a board in your floor. Consult your distributor or replace your board yourself.




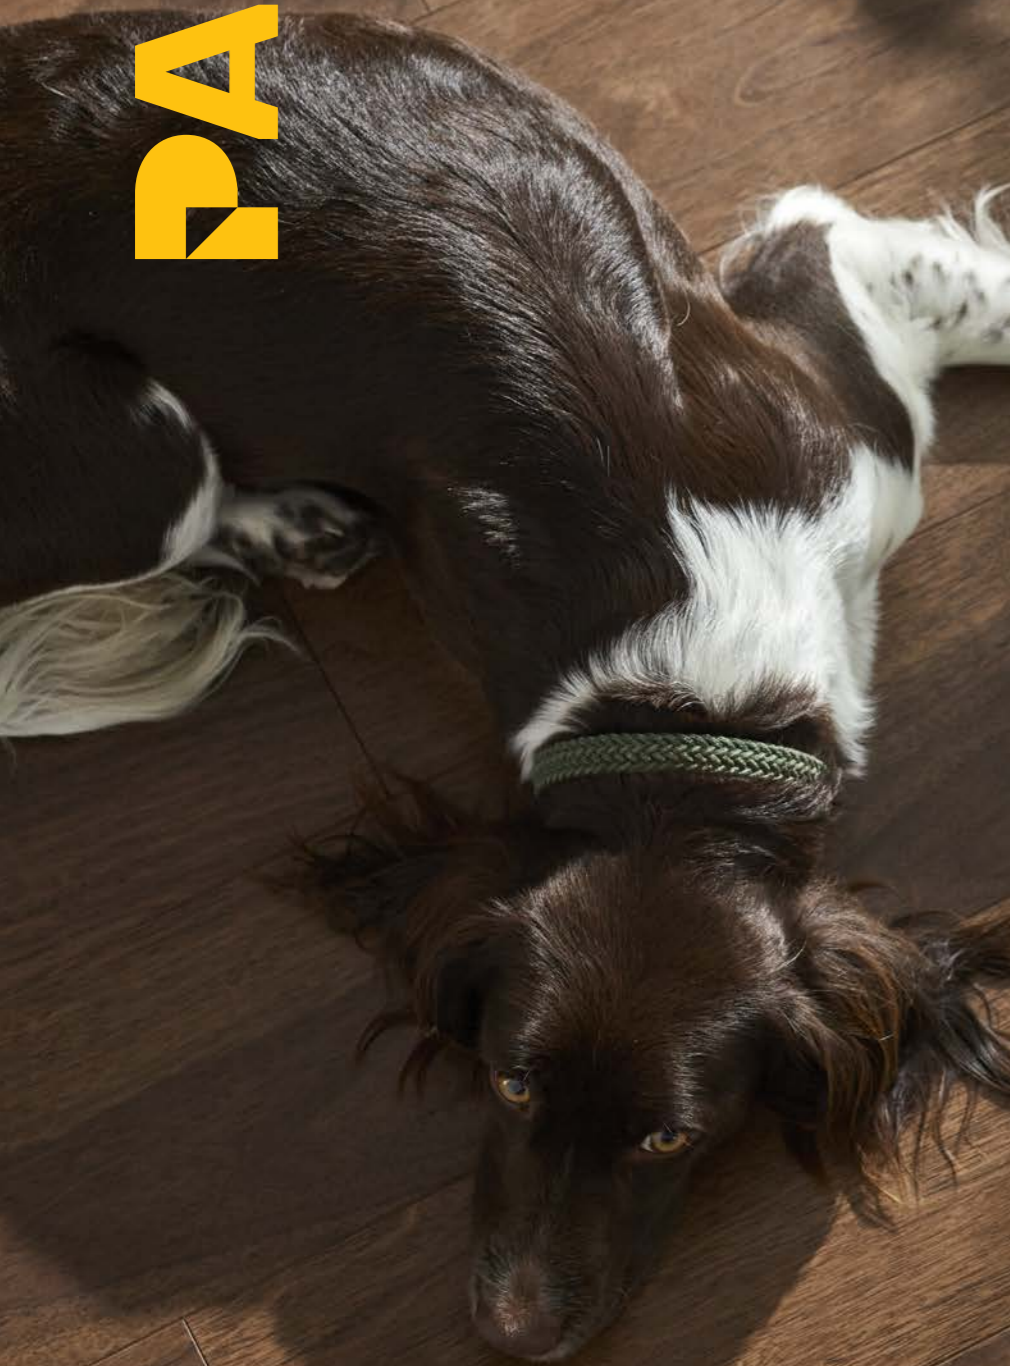






The complete manual of our maintenance products and tutorials for replacing a board can be found at www.par-ky.com



PARKY[®]



BOARD FLOOR				PATTERN FLOOR
	 incl. 2 mm cork			
Pro	Deluxe+	Master	Summit	Swing

Usage classification*						
Board	Dimensions	1203 x 190 mm 47-3/8 x 7-1/2 inch	1810 x 166 mm 71-1/4 x 6-1/2 inch	1506 x 166 mm 59-5/16 x 6-1/2 inch	2050 x 233 mm 80-3/4 x 9-1/8 inch	593 x 121 mm 23-3/8 x 4-3/4 inch
	Thickness	7.2 mm 9/32 inch	12 mm 1/2 inch	10 mm 3/8 inch	10 mm 3/8 inch	10 mm 3/8 inch
	Wear layer	0.6 mm	0.6 mm	0.6 mm	0.6 mm	0.6 mm
	Click system					
Box	Boards	11	7	8	5	11
	Surface area	2.514 m ² 27.06 sq.ft	2.103 m ² 22.64 sq.ft	2.000 m ² 21.53 sq.ft	2.388 m ² 25.7 sq.ft	0.789 m ² 8.49 sq.ft
	Weight	16,30 kg	17.70 kg	17,3 kg	19,20 kg	6,9 kg
Finish	Maxi +/- 1.5 mm	-	2	-	2	-
	Bevel	4	2	4	2	4
	Mini +/- 0.5 mm					
Gloss	Super matt (3%)	Super matt (3%)	Super matt (3%)	Super matt (3%)	Super matt (3%)	Super matt (3%)
Structure	Brushed	Brushed	Brushed	Brushed	Brushed	Brushed

Oaks

European Oak	Premium	PRB101	DEXB+101		SWXB101
	Rustic Light	PRB135			
Ivory Oak	Premium	PRB102	DEXB+102		SWXB102
	Rustic Light	PRB110	DEXB+110		SWXB110
Milk Oak	Premium	PRB103			
	Rustic Light	PRB137			
Desert Oak	Premium	PRB104	DEXB+104		
	Rustic Light	PRB116			
Umber Oak	Premium	PRB134			
Antique Oak	Premium	PRB106			
Mountain Oak	Rustic Light	PRB199			
Essence Oak	Premium			MAXB188	SUXB188
	Rustic Light				SUXB189
Silk Oak	Premium			MAXB193	SUXB193
	Rustic Light				SUXB190
Valley Oak	Premium			MAXB194	

Walnuts

Smoked Walnut		PRB203			SWXB203
Frozen Walnut					SUXB218

* Usage classification 31: residential + low commercial. Usage classification 33: residential + high commercial.



	TEST METHOD	Pro
Wood veneer floor covering	EN 14354	
Domestic usage classification	EN 14354	Class 23
Commercial usage classification	EN 14354	Class 31
Warranty	DECOSPAN nv	Residential use: 15 years Low commercial use: 5 years
CE certification	EN 14342	EN 14342
Dop n°		19005
GENERAL PROPERTIES		
Moisture content	EN 322	6 % (+/-1)
Dimensions of floor boards	EN 14354	1203 x 190 x 7,2mm
Thickness of the wear layer	EN 14354	0,6 mm
Deviation of thickness	EN 14354	±0,5 mm
Deviation of squareness	EN 324-2	±0,2 mm
Cup in width direction	EN 14354	±0,2 %
Flatness deviation	EN 14354	4%
Internal bond	EN 319	> 1,4 N/mm²
Veneer glueing adhesion	DIN EN 205	≥ 1 N/mm²
Mechanical connection system		Uniclic®
Opening between elements	EN 14354	≤ 0,2 mm
Tensile strength on short end	ISO 24334	> 2000 N/lm
Density	EN 323	900
Weight/m²		7 kg
CLASSIFICATION PROPERTIES		
Thickness distention	EN 14354	< 13%
Resistance to indentation	EN 1534	≥ 30 N/mm²
Resistance to abrasion	EN 14354	> 2000 rev.
Impact resistance	EN 438-2.21	≥ 1200 (EC2)
Adhesion of the lacquer	EN ISO 2409	class < 2
Resistance to chemical agents	EN 13442	grade 4*
ADDITIONAL PROPERTIES		
Gloss	EN ISO 2813	super matt 3% (+/- 1)
Hardness of the lacquer	DIN 53154	≥ 3 Newton
Residual indentation	EN 433	< 0,05 mm
Impact resistance acc. to Wegner	EN 438-2 / 11	≥ 5 Newton
Elasticity of the lacquer	CEN / TC 112 (Brinell)	2 Hb
Colour fastness	EN ISO 105-B02	grade > 6
Castor chair resistance	EN 425	no visible change
Underfloor heating		OK
Thermal resistance	EN 12667	0,053 m²K/W
Thermal conduction	EN 12667	0,14 W/mK
Normalized impact sound pressure level	ISO 10140-3 / ISO 717-2 (Ln,w)	55 dB
Reduction of impact sound pressure level	ISO 10140-3 / ISO 717-2 (ΔLw)	20 dB
A-weighted walking noise	EN 16205 (Ln,walk,A)	91 dB (A)
Loudness of reflected walking noise	EN 16205 Loudness RWS	68,7 sone
Antistatic performance	EN 1815	< 2 kV (antistatic)
Biological durability	EN 335	Class 1
Well-managed forests		FSC® certified*** (optional)
Martindale test (scratch resistance)	EN 16094	MSR-B3
SAFETY PROPERTIES		
VOC loss	French VOC regulation ISO 16000	A+
VOS M1		Pass
VOS LEED V4		Compliant
VOS BREEAM		Compliant
VOS Indoor air comfort GOLD		Pass
Formaldehyde emission	EN 717-1	E1
Formaldehyde emission	CDPH	Pass
Formaldehyde emission baseboard	ASTM E 1533	CARB II / TSCA Title VI Compliant
PCP (pentachlorophenol)	CEN / TR 14823	PCP free
Burning cigarette	EN 438-2 / 30	Class 3**
Fire reaction and smoke generation	EN 13501-1	Class Cfl-s1
Slip resistance (dry)	CEN / TS 15676	62,25 USRV (average)
Slip resistance (wet)	CEN / TS 15676	47,75 USRV (average)

Deluxe+	Master	Summit	Swing
Class 23	Class 23	Class 23	Class 23
Class 33	Class 33	Class 33	Class 33
Residential use: limited lifetime warranty Commercial use: 10 years	Residential use: limited lifetime warranty Commercial use: 10 years	Residential use: limited lifetime warranty Commercial use: 10 years	Residential use: limited lifetime warranty Commercial use: 10 years
EN14342:2013	EN14342:2013	EN14342:2013	EN14342:2013
19007	19003	19004	19010
6 % (+/-1)	6 % (+/-1)	6 % (+/-1)	6 % (+/-1)
1810 x 166 x 12 mm	1506 x 166 x 10 mm	2050 x 233 x 10 mm	593 x 121 x 10mm
0,6 mm	0,6 mm	0,6 mm	0,6 mm
±0,5mm	±0,5mm	±0,5mm	±0,5mm
±0,2 mm	±0,2 mm	±0,2 mm	±0,2 mm
±0,2 %	±0,2 %	±0,2 %	±0,2 %
3%	3%	3%	3%
> 1,3 N/mm²	> 1,3 N/mm²	> 1,3 N/mm²	> 1,3 N/mm²
≥ 1 N/mm²	≥ 1 N/mm²	≥ 1 N/mm²	≥ 1 N/mm²
Unifit X®	Unifit X®	Unifit X®	Unifit X®
≤ 0,2 mm	≤ 0,2 mm	≤ 0,2 mm	≤ 0,2 mm
> 2000 N/lm	> 2000 N/lm	> 2000 N/lm	> 2000 N/lm
850	850	850	850
10 kg	7 kg	7 kg	7 kg
< 10 %	< 10 %	< 10 %	< 10 %
≥ 40 N/mm²	≥ 40 N/mm²	≥ 40 N/mm²	≥ 40 N/mm²
> 6000 rev.	> 6000 rev.	> 6000 rev.	> 6000 rev.
≥ 1400 (EC3)	≥ 1400 (EC3)	≥ 1400 (EC3)	≥ 1400 (EC3)
class < 2	class < 2	class < 2	class < 2
grade 4*	grade 4*	grade 4*	grade 4*
super matt 3% (+/- 1)	super matt 3% (+/- 1)	super matt 3% (+/- 1)	super matt 3% (+/- 1)
≥ 4 Newton	≥ 4 Newton	≥ 4 Newton	≥ 4 Newton
< 0,05 mm	< 0,05 mm	< 0,05 mm	< 0,05 mm
≥ 8 Newton	≥ 8 Newton	≥ 8 Newton	≥ 8 Newton
2 Hb	2 Hb	2 Hb	2 Hb
grade > 6	grade > 6	grade > 6	grade > 6
no visible change	no visible change	no visible change	no visible change
OK	OK	OK	OK
0,109 m²K/W	0,073 m²K/W	0,073 m²K/W	0,073 m²K/W
0,11 W/mK	0,14 W/mK	0,14 W/mK	0,14 W/mK
60 dB	56 dB	56 dB	56 dB
15 dB	19 dB	19 dB	19 dB
97 dB (A)	94 dB (A)	94 dB (A)	94 dB (A)
96,1 sone	80,3 sone	80,3 sone	80,3 sone
< 2 kV (antistatic)	< 2 kV (antistatic)	< 2 kV (antistatic)	< 2 kV (antistatic)
Class 1	Class 1	Class 1	Class 1
FSC® certified*** (optional)	FSC® certified*** (optional)	FSC® certified*** (optional)	FSC® certified*** (optional)
MSR-B3	MSR-B3	MSR-B3	MSR-B3
A+	A+	A+	A+
Pass	Pass	Pass	Pass
Compliant	Compliant	Compliant	Compliant
Compliant	Compliant	Compliant	Compliant
Pass	Pass	Pass	Pass
E1	E1	E1	E1
Pass	Pass	Pass	Pass
CARB II / TSCA Title VI Compliant	CARB II / TSCA Title VI Compliant	CARB II / TSCA Title VI Compliant	CARB II / TSCA Title VI Compliant
PCP free	PCP free	PCP free	PCP free
Class 3**	Class 3**	Class 3**	Class 3**
Class Cfl-s1	Class Cfl-s1	Class Cfl-s1	Class Cfl-s1
62,25 USRV (average)	62,25 USRV (average)	62,25 USRV (average)	62,25 USRV (average)
47,75 USRV (average)	47,75 USRV (average)	47,75 USRV (average)	47,75 USRV (average)

* 1=surface destruction, 5=no visibel changes / ** class 3 = moderate change of gloss level and/or moderate brown spot / *** FSC C095327



Choosing a floor isn't just something you use your eyes for. You have to be able to feel it and experience for yourself what the effect of each type of wood and finish is. Count on our experts, who will be happy to put their savoir-faire at your disposal to help you.



Need more inspiration?

Follow us on Instagram

@parkyfloors #myPARKYfloor



Quickly find a store near you?

Scan the code or go to

www.par-ky.com/en/dealers

It's good to live on wood

DECOSPAN

Proudly
made in
Belgium

Decospan nv
Industriezone Grenslaan
Lageweg 33
8930 Meneen - België
tel +32 56 52 88 49
info@par-ky.com

© Decospan 2023 - Nothing from this brochure may be reproduced without written prior permission. Please note that the information in this brochure may be outdated and a new version may already have been issued. That is why we recommend you to always consult our website to download the most recent version. The photos of the different wood species, as shown in this brochure, are a representation of a unique part of wood and are not binding for future deliveries. Decospan is committed to the continuous improvement of its products and services, therefore the actual products may differ from the products and pictures in this brochure. Decospan disclaims any liability pursuant to the variations that may occur between the products and pictures in this brochure and the actual products. All content in this brochure is for information purposes only and no rights can be obtained therefrom.