

תוכנית

תנועה

Shou Sugi Ban

Shou Sugi Ban

An ancient tradition

Shou Sugi Ban ('charred cypress') is a special Japanese charring technique, inspired by an ancient tradition. Three slabs of pinewood would be bound together into the shape of a chimney and a fire was lit inside the base.

This is how the facade parts of traditional Japanese wooden houses were given a fire-retardant, sustainable, and natural protective layer. Shou Sugi Ban is still being applied in Japan. It is also used for modern buildings, designed by well-known architects such as Terunobu Fujimori.

From Japan to Europe

Our founder, architect Pieter Weijnen, was the first person to bring Shou Sugi Ban to Europe. He then set out to master the traditional wood charring technique. In addition, he developed an efficient production process to guarantee the top-quality of our charred wood. Even and sustainable.

Old-fashioned craftsmanship, modern techniques

Our firemasters char all our wood, one by one, in a controlled environment in our own workshop in Leersum, a small village in The Netherlands. This way we can guarantee equal and uniform technical specifications.

In our test centre, we continue to pioneer and innovate to find new ways of charring, to identify new sustainable wood types and to create new finishes with biodegradable resin and oil.





Our team

Passion for wood and fire

Since 2012 we combine old-fashioned craftsmanship with modern technology (and a love of wood and fire). The result: a beautiful collection of black charred wood types of the highest quality. Exclusive, and each with their own beautiful texture, character, and finish. All orders are sized, sawn and carefully charred to your personal specifications.

Making beautiful things together

Since our founding, we have realised hundreds of beautiful projects all around the globe. Together with leading architects and designers. Clients who, like us, have a profound fondness for the perfect appearance, the highest quality and want to make a statement with a sustainable, exclusive, and natural product.

Our Zwarthout team

Our team is made up from a diverse group of specialists: Architectural builders, product developers, carpenters, cabinet makers, designers, and artists. We all have a fondness for natural and fair materials: For wood with character and, of course, for fire!

Sustainability

Sustainable building and living should be – if you ask us – the norm for a better planet.

Wood from sustainably grown forests

We consciously choose wood for our luxurious facade and interior cladding. Each wooden board stores CO₂, and thus contributes to the reduction of CO₂ in the atmosphere. Of course, our wood comes from sustainably managed forests and nearly all our products are bio-based and/or biodegradable.

Replanting trees

For every tree used, we replant trees. We replant in several ways.

All clients can join us on our annual Zwarthout tree planting day, where they can plant their own trees back on one of the estates that surround our company. This way, we can collectively watch our trees grow.

CO₂-neutral

We have the ambition to make our production process completely CO₂ neutral. This is possible thanks to our newly designed oven combined with heat exchangers. In this way, the companies and homes on the estate where we are located are heated with the energy released during our production process.



Our products

Cladding and interior



Marugame
Page 12



Marugame fixated
Page 12



Nakatado
Page 16



Omiyama
Page 20



Omiyama fixated
Page 20



Shodoshima matt
Page 24



Shodoshima
semi-gloss
Page 24



Sakaide
Page 28



Takamatsu matt
Page 32



Takamatsu
semi-gloss
Page 32




Yoroi
Page 36

Cladding

Only for outdoor applications



Naoshima
Page 38



Naoshima fixated
Page 38

Beautifully charred wood

Our exclusive Zwarthout | Shou Sugi Ban charred wood types each have their own unique characteristic texture and appearance.

On the following pages you will find an overview of all our beautiful products: As special facade cladding or striking eye-catcher in the interior.

Personal advice and perfect mounting

The application and assembly of Shou Sugi Ban charred wood is a profession of its own. That is why we like to think along about your design, detailing and implementation.

The experts of our Zwarthout mounting service can also assemble and mount our black charred wood in the most beautiful (and technically sound) way for you. So you can fully enjoy the stunning result for a long time.



Marugame

Characteristic,
versatile,
silvery charred layer

Marugame


This beautiful, charred wood has a characteristic and equally divided pattern. The silvery glow of the charred layer has a different look depending on the angle of the sunlight. The hard charred layer makes Marugame ideal as a sustainable cladding for roofs and facades. Marugame is also very suitable as an attractive eye-catcher in a special interior.

Wood type

The wood used for Marugame is Accoya® of the Pinus Radiata tree, a fast-growing pine species. The wood is modified through a non-toxic acetylation process. Accoya® is labelled with durability class 1 and other quality certifications (i.a. KOMO, RAL, BBA, WDMA), and a cradle-to-cradle gold certification. The wood has a lifespan of at least 50 years above ground, and 25 years when in contact with soil and fresh water.

Fixation

In addition to the carbon-only version, we can also supply Marugame that has undergone treatment with Bito White, a colourless resin, which is water based. The charred layer becomes a bit more matt in appearance and will stain less. This makes the treated Marugame product extremely suitable for interior applications.



Technical specifications



Interior and exterior
(including roof applications)



Durability class: 1
(European standard – EN350)



Fire class: D
(European standard – EN13501)



New Zealand
(FSC® certified forests)



Maintenance free

Dimensions

Thickness: 10 mm | 23 mm
Width: 100 mm | 150 mm | 200 mm
Length: 2400 mm | 3000 mm |
3600 mm | 4200 mm | 4800

Other profiles and dimensions are possible
in consultation.



WOODSTC



Marugame

The Hub Woodstoxx, Gent (BE)
Photographer: Cafeine
→
Villa, Lège-Cap-Ferret (FR)
Architect: Florent Pasquier
Photographer: Maxime Gautier





Nakatado

Special flame pattern,
brushed,
lively grain structure

Nakatado

After this beautiful type of wood has been carefully charred by our fire masters, Nakatado is brushed and treated. This is how the lively grain structure becomes visible, with a height difference of 1 to 2 mm between the higher and lower parts of the grains. The flame pattern on the wood creates a calm and rustic pattern. Nakatado is resistant to all weather conditions and does not stain.

Wood type

Nakatado is made from Pinus Radiata, a fast-growing pine species from FSC® certified forests in New Zealand. The wood is thermally modified by heating it up to high temperatures. Because of this process, the wood type has a durability class 1 (EN350) certification. Nakatado has a lifespan of at least 30 years.

After-treatment

Nakatado is treated with Bito Black matt. We recommend reapplying Bito Black matt every three to five years for colour retention and extra protection.



Technical specifications



Interior and exterior
(including roof applications)



Durability class: 1
(European standard – EN350)



Fire class: D
(European standard – EN13501)



New Zealand
(FSC® certified forests)




Maintenance every 3 to 5 years

Dimensions

Thickness: 21 mm
Width: 68 mm | 92 mm | 140 mm | 190 mm
Length: 3000 mm | 3600 mm | 4200 mm |
4800 mm

Other profiles and dimensions are possible
in consultation.

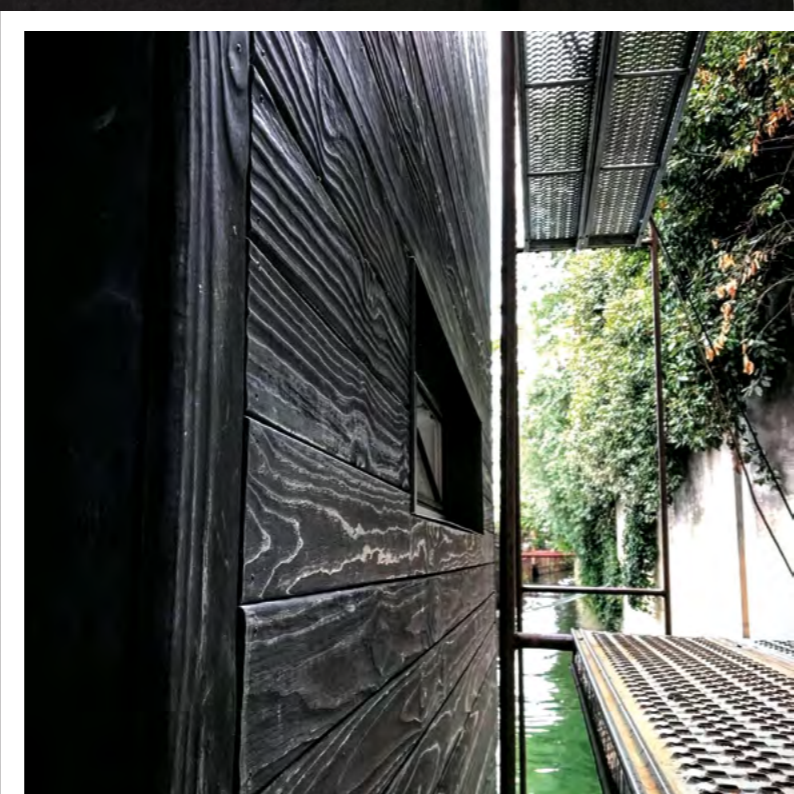

Nakatado

Houseboat (FR)

→

House and garage (NL)

Architect: Zondervan Architectuur



Omiyama

Hard charred layer,
irregular pattern,
matt appearance

Omiyama


Omiyama's hard charred layer gets a beautiful bronze glow in the sun. The charred layer is burnt deep and has a natural uneven structure. This variant is resistant to heavy weather conditions. This makes Omiyama very suitable as a durable finish on facades. Omiyama is also a powerful eye-catcher indoors. Fixated, Omiyama becomes deep matt black in colour.

Wood type

Omiyama is made of thermally modified hardwood from West-Africa. By heating up the wood, the cell structure changes, making it more sustainable.

Fixation

Omiyama can be used either with or without a fixation agent. The fixated variant of Omiyama is treated with Bito White, a water-based resin. The charred layer becomes a bit more matt in appearance and will stain less. Once fixated, Omiyama can be used for interior applications.



Technical specifications



Interior and exterior
Durability class: 2



Durability class: 2
(European standard – EN350)



Fire class: D
(European standard – EN13501)



West-Africa
(FSC® certified forests)



Maintenance free

Dimensions

Thickness: 21 mm | 30 mm | 41 mm
Width: 95 mm | 120 mm | 145 mm | 195 mm
Length: up to 5000 mm

Other profiles and dimensions are possible in consultation.



Omiyama

Farmhouse, Leusden (NL)
Architect: BLAUW Architecten

→

Residential villa, Waalre (NL)
Architect: Lichtstad Architecten
Photographer: Bas Gijssels





Shodoshima

Lively flame pattern,
robust, versatile,
contemporary

Shodoshima


For Shodoshima, the wood is sawn parallel to the growth rings (dosse). This creates a beautiful flame drawing. After burning in the oven, the wood is brushed and treated. The robust and lively grain structure is clearly visible and shines beautifully in the sun.

Wood type

Shodoshima is made from the Douglas fir, which comes from FSC® certified forests in Europe. Thanks to the durability class 3, Shodoshima is very suitable as beautiful, durable facade cladding. The knots in the wood give an extra irregular effect.

After-treatment

After charring Shodoshima, it is brushed and treated with Bito Black semi-gloss or matt. Bito Black offers a solid protection against water, dirt, and fungi. We recommend repeating this treatment every three to five years. Shodoshima is weather resistant and does not stain.



Technical specifications



Interior and exterior



Durability class: 3
(European standard – EN350)



Fire class: D – B after impregnation
(European standard - EN13501)



Europe
(FSC® certified forests)



Maintenance every 3 to 5 years

Dimensions

Thickness: 23 to 30 mm
Width: 60 mm to 250 mm
Length: up to 5000 mm

Other profiles and dimensions are possible in consultation.



Shodoshima

Farmhouse (NL)
Architect: Quist Wintermans Architekten
Contractor: M.G. Wolfswinkel B.V.
Photographer: Anahí Clemens

→
Fire station, Maarn (NL)
Architect: Mies Architectuur

Villa, Solothurn (CH)
Architect: archiwork ag
Construction company: S&F Holzbau





Sakaide

Beautiful flame pattern,
solid sawn,
warm appearance

Sakaide

Sakaide has a beautiful, contrasting flame pattern, giving the wood a rustic, warm appearance. The planks are sawn flat (with the annual rings), and then charred one by one in our oven. The planks are then carefully brushed and treated.


Wood type

Sakaide is made from the Douglas fir. A type of wood originating from FSC® certified forests in Europe. The knots give the wood an extra uneven effect. It has durability class 3, which makes it ideal for sustainable cladding.

After-treatment

After burning and brushing, Sakaide is treated with Bito Clear or Bito Orange. Bito Clear is a transparent oil used for interior applications.

For exterior applications, Sakaide is treated with Bito Orange. This is a water-based oil specifically developed for exterior use.



Technical specifications



Interior and exterior



Durability class: 3
(European standard – EN350)



Fire class: D
(European standard – EN13501)



Europe
(FSC® certified forests)




Maintenance every 3 to 5 years

Dimensions

Thickness: 23 mm up to 30 mm
Width: 60 mm up to 250 mm
Length: up to 5000 mm

Other profiles and dimensions are possible
in consultation.

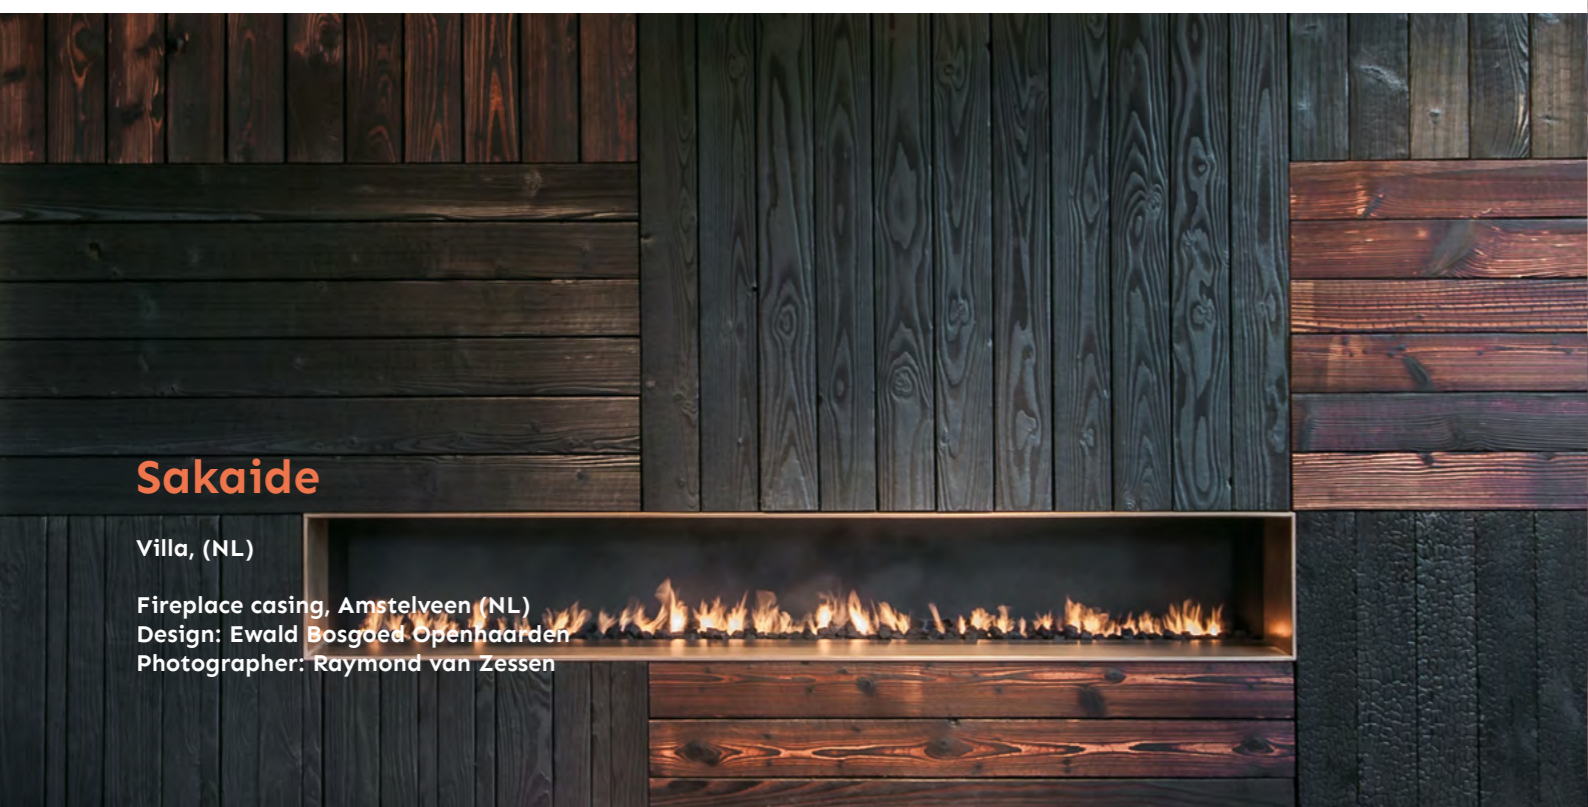

Sakaide

Villa, (NL)

Fireplace casing, Amstelveen (NL)
Design: Ewald Bosgoed Openhaarden
Photographer: Raymond van Zessen





Takamatsu

Classic look,
fine linear structure,
quarter sawn

Takamatsu


For Takamatsu, the wood is sawn on the annual rings (quarter/false quarter). This way of sawing gives Takamatsu its special, fine linear structure and a classic, modest appearance. After careful charring in our oven, the wood is brushed and treated.

Wood type

Takamatsu is made from the Douglas fir; a type of wood originating from FSC® certified forests in Europe. The presence of knots in the wood makes it more characteristic and are visible in the charred layer. During the charring process, knots up to 2 cm in size can fall out. This gives it an extra irregular effect.

After-treatment

After burning and brushing the wood, Takamatsu is treated with either our Bito Black semi-gloss or matt. Bito Black gives the wood a protective layer against water, dirt, and fungi. We recommend repeating this treatment every three to five years for optimal protection and colour retention and a longer life. Takamatsu is weather resistant and does not stain.



Technical specifications



Interior and exterior



Durability class: 3
(European standard – EN350)



Fire class: D – B after impregnation
(European standard - EN13501)



Europe
(FSC® certified forests)



Maintenance every 3 to 5 years

Dimensions

Thickness: 23 mm up to 40 mm
Width: 60 mm up to 150 mm
Length: up to 5000 mm

Other profiles and dimensions are possible
in consultation.



Takamatsu

Villa, Oostduinkerke (BE)

Carport, Bonifacio (FR)


Design and photos: Alexandra de Lanfranchi

→

De Nieuwe Schuur, Herpt (NL)

Architect: Mecanoo

Photographer: Stijn Poelstra

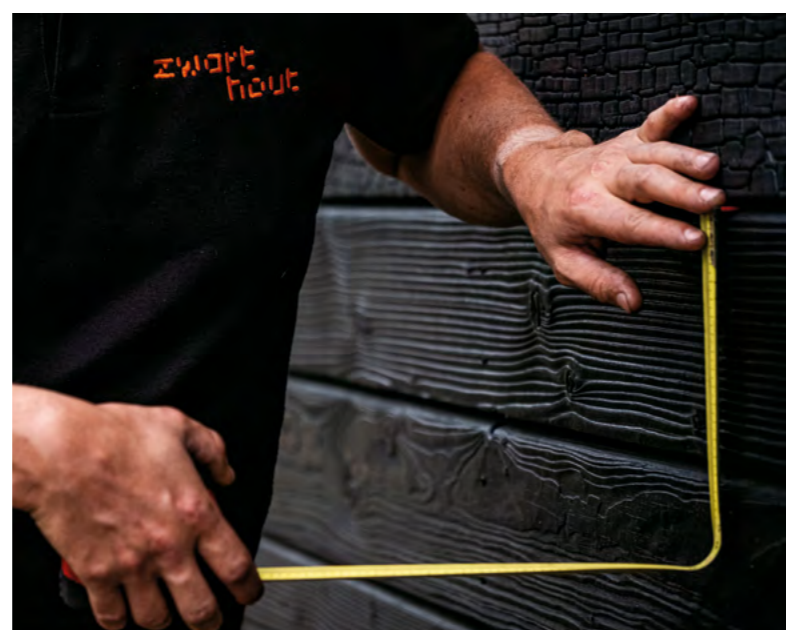



Yoroï

The hard charred layer and refined pattern of Yoroï has a silver glow in the sun. The deeply burnt bamboo has a natural appearance and is specifically designed for projects where fire class B is required, such as public buildings, tall buildings, and emergency routes. This makes Yoroï eminently suitable as sustainable cladding. Yoroï is also an eye-catcher when used for interior applications.

Material

Yoroï is made from FSC® thermally modified bamboo from China. It is made by pressing bamboo fibres into boards in a CO2 neutral way. The bamboo boards then receive their charred layer, one by one, in our oven.

Fixation

We can fixate the charred layer of Yoroï with Bito White, a water-based resin. By fixating it, the surface becomes a bit more matt to the eye and does not stain. This makes the fixated variant ideal for interior applications.

Technical specifications



Interior and exterior



Durability class: 1
(European standard – EN350)



Fire class: B
(European standard – EN13501)



China
(FSC® certified forests)



Maintenance free

Dimensions

Thickness: 18 mm
Width: 155 mm
Length: 1850 mm

Other profiles and dimensions are possible in consultation.

Yoroï

Deeply charred bamboo,
natural appearance,
refined pattern



Naoshima

Characteristic,
irregular pattern,
nice patina

Naoshima


Naoshima has a natural and irregular pattern that shines beautifully in the sun. The brittle charred layer weathers and ages, giving it more character over the years. This fits within the Japanese philosophy of Wabi Sabi, a philosophy that embraces the calming beauty of the transient and the imperfect.

Wood type

Naoshima is made from the Douglas fir. A type of wood originating from FSC® certified forests in Europe. The presence of knots in the wood makes it more characteristic and are visible in the charred layer. Naoshima is labelled with a durability class 3 certification and can be used as a sustainable choice for cladding.

After-treatment

In addition to the variant that is only charred, we can also supply Naoshima fixated. We then treat the charred wood with Bito White, a water-based resin. This ensures that the black carbon layer becomes somewhat matt and emits less.



Technical specifications



Exterior



Durability class: 3
(European standard – EN350)



Fire class: D
(European standard – EN13501)



Europe
(FSC® certified forests)



Maintenance free

Dimensions

Thickness: 23 mm up to 30 mm
Width: 60 mm up to 250 mm
Length: up to 5000 mm


Other profiles and dimensions are possible
in consultation.



Naoshima

Treehouse Sables D'or les Pins, Fréhel (FR)
Design: Victoria Migliore
Photographer: Cyril Folliot

→ Residential building Westbroek (NL)
Architect: ORGA Architect

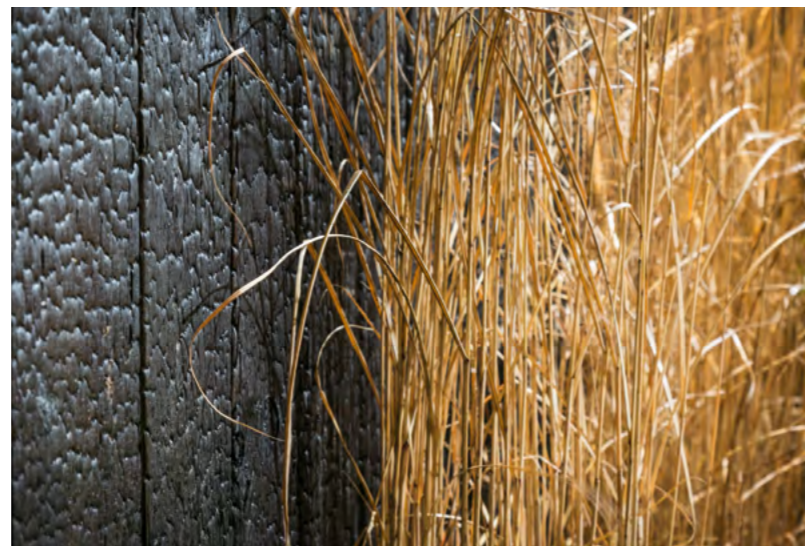



The Zwarthout mounting service

Designing with charred wood requires special knowledge and skills. Because of our broad experience with hundreds of projects, we can give you thorough advice on aesthetic and technical design choices. You can also make use of our very own professional Zwarthout mounting service.

Professional advice from our specialists

Our team is made up of a diverse group of specialists. Thanks to their unique backgrounds, we can always – depending on the design of your project – give out the right advice on detailing and finishes. On request, we can also create a mock-up for you.

The Zwarthout mounting service

The experts of our Zwarthout mounting service can help you assemble our wood in the most beautiful (and technically best) way possible. So, you can optimally enjoy the wonderful result. The Zwarthout mounting service is available for projects in the Netherlands, Belgium, France, Germany, and Switzerland.



אזכרה
אניטה
Shou Sugi Ban

Middelweg 85
3956 TL Leersum, The Netherlands
+31 343 768 959
contact@zwarthout.com
www.zwarthout.com

Further examples?
Follow us on social media

